

MDR SPUR RSL/RSH


Series 1500 Conveyor Module

Controls Platform: G20 Full Control



POWERED BY
TREW[®]

MDR spur modules are a 30° spur that can be placed nearly anywhere on a new or preexisting system. Built-in and factory-mounted guard rail are included. Pre-mounted in-frame photo eyes are prewired and protected from product. No pneumatics required. The all 24VDC electric operation ensures a consistent and quiet system that is easy to maintain.

- 8" Minimum Product Size
- Up to 180 FPM
- Available in 18:1 (geared)
- O-Band

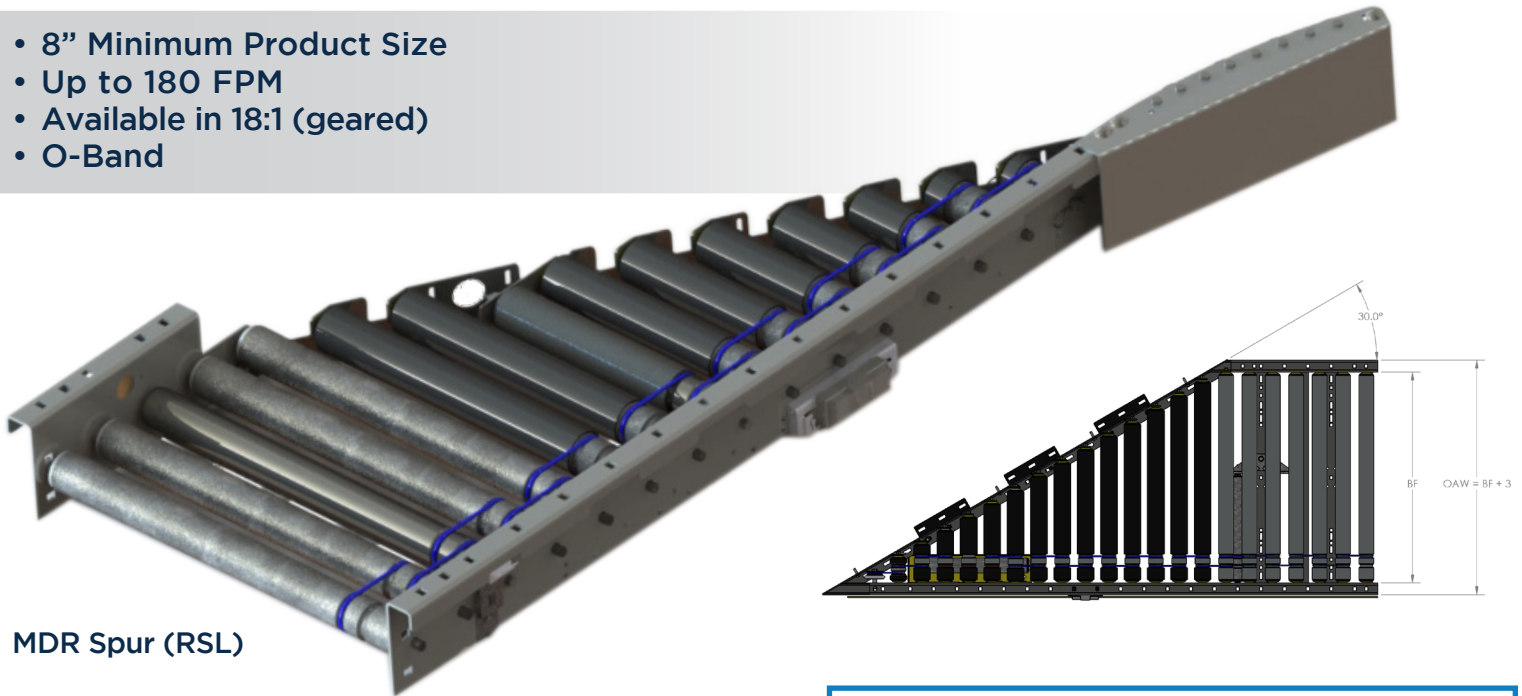

MDR Spur (RSL)

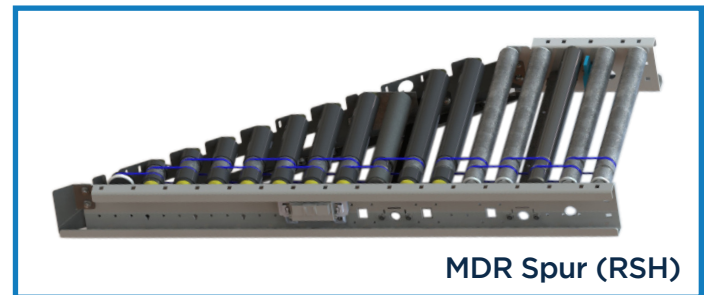

MDR Spur (RSH)

KEY FEATURES AND BENEFITS

- Merge any line that is not perpendicular to the trunk line
- Light to medium weight applications up to 75 lbs
- Resilient and durable construction. Perfect for distribution, warehouse, process lines and postal applications
- Tool-less mounting brackets for all electrical components
- Electrical components have quick connect terminals for easy installations and expansion
- Using durable, high tension 5/16 O-bands
- Available ZPA Analyzer allows for system diagnostic and commissioning
- IP54 Standard

SERIES 1500 CONVEYOR - MDR SPUR, 30°

Part #	Angle	Side Channel	Roller C-C"	MDR Type	Hand	Control	Color
TR15041 (15 BF) TR15042 (21 BF) TR15043 (27 BF) TR15044 (33 BF) TR15045 (36 BF)	30°	RSL	3"	EC5000 <i>(geared)</i>	LH RH	FULL	F9022 F7035
TR15046 (15 BF) TR15047 (21 BF) TR15048 (27 BF) TR15049 (33 BF) TR15050 (36 BF)	30°	RSH	3"	EC5000 <i>(geared)</i>	LH RH	FULL	F9022 F7035

Engineer to order options include: IP67, flex control, additional BFs, additional zone lengths, additional MDRs & gear ratios, custom rail colors. Additional options may be available upon request. Contact Trew Engineering for further information.