

MDR SPUR CURVE

Series 1500 Conveyor Module




Controls Platform: G20 Full Control

POWERED BY

TREW[®]

MDR spur curve modules deliver a convenient solution for consolidation applications and have a 90° spur for tighter footprints. Pre-mounted in-frame photo eyes are prewired and protected from product. No pneumatics required. The all 24VDC electric operation ensures a consistent and quiet system that is easy to maintain.

- 8" Minimum Product Size
- Up to 180 FPM
- Available in 21:1 (geared)
- Up to 75 lbs
- O-Band

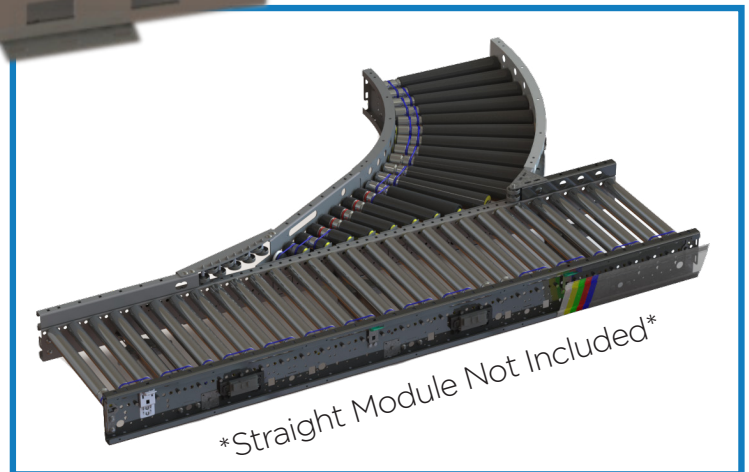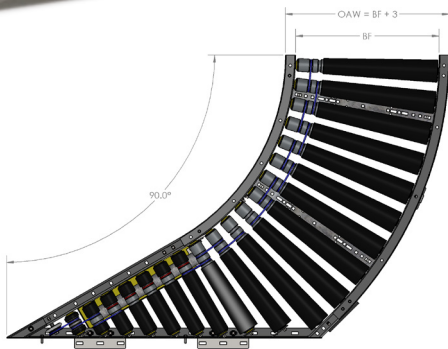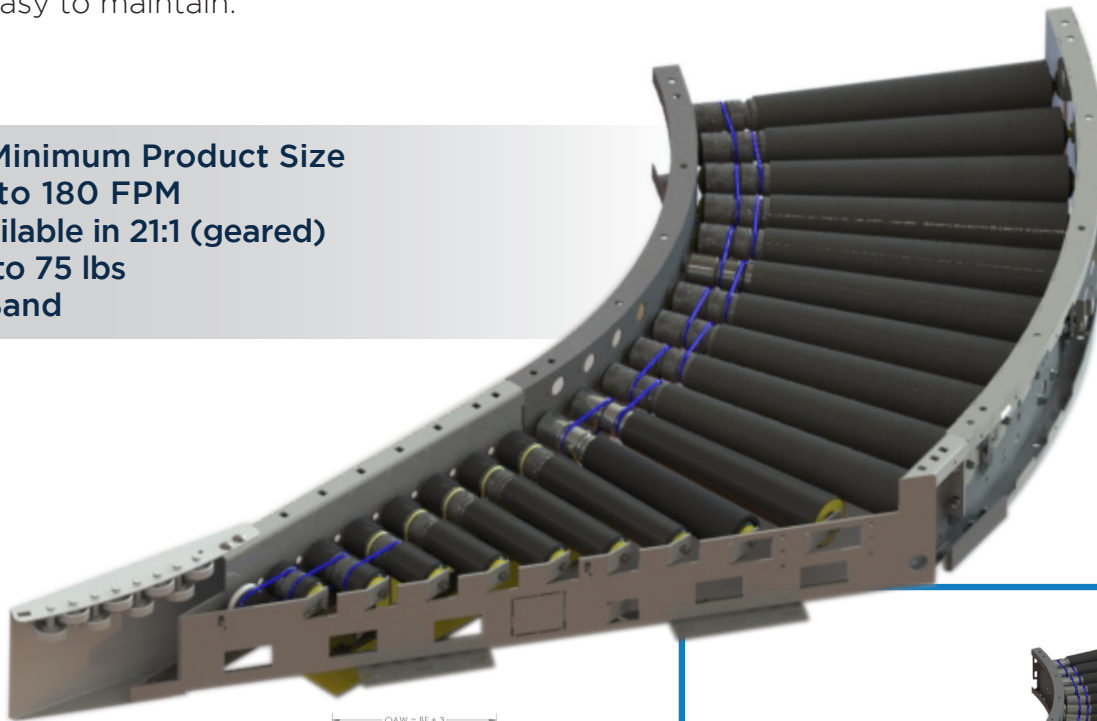

KEY FEATURES AND BENEFITS

- Merge any line that is perpendicular to the trunk line
- Light to medium weight applications up to 75 lbs
- Resilient and durable construction. Perfect for distribution, warehouse, process lines and postal applications
- Tool-less mounting brackets for all electrical components
- Electrical components have quick connect terminals for easy installations and expansion
- Using durable, high tension 5/16 O-bands
- Available ZPA Analyzer allows for system diagnostic and commissioning
- IP54 Standard

MDR SPUR CURVE

MERGE MODULE - Series 1500

SERIES 1500 CONVEYOR - MDR SPUR CURVE, RSL

Part #	Width (BF)	Merge	Side Channel	Roller C-C"	MDR Type	Hand	Control	Color
TR15128 (15 BF)	15, 21, 27, 33, 36	LH	RSL	3"	EC5000 (geared)	LH	FULL	F9022
TR15130 (21 BF)		RH				RH		F7035
TR15131 (27 BF)								

Engineer to order options include: Flex control, additional BFs, additional zone lengths, additional MDRs & gear ratios, gap rollers, tight radius, custom rail color. Additional options may be available upon request. Contact Trew Engineering for further information.